

DYNAVOICE

EXPERIENCE THE NORDIC SOUND

The DM-6II is the latest evolution in our acclaimed Definition series monitor speakers. Building on a timeless design, it delivers an immersive listening experience that truly defines the Nordic sound.

A robust cabinet- featuring 35mm thick front and rear panels, 15mm side panels, and multiple internal bracing - ensures a rigid, resonance-free enclosure. It houses a 6,5-inch resin coated Kevlar™ driver with an NBR rubber surround, paired with a combined soft dome and ribbon tweeter for dynamic, detailed sound.

The Dynavoice X-Change bi-wire terminals, equipped with gold-plated connectors, enables midrange fine-tuning for a personalized listening experience.



DEFINITION

DM-6II


PRODUCT SPECIFICATIONS

Type:	Three-way bass reflex bookshelf speaker
Speaker drivers:	Woofer: 1pc Ø142mm Kevlar cone Tweeter: 1pc Ø36mm Silk dome Tweeter: 1pc 18x50mm Ribbon
Sensitivity (1W/1M):	92dB
Power handling:	85W (RMS)
Rec. amplifier power:	25-120W (RMS)
Nominal impedance:	6 Ohm
Minimum impedance:	3.5 Ohm
Frequency response:	35 - 32000 Hz
Crossover Frequency:	3000 / 13000 Hz
Net weight (each):	9.1 kg

Available colors:



 RESEARCHED & DESIGNED
IN SWEDEN

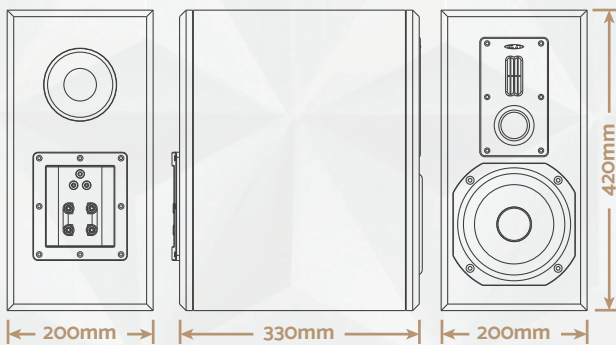

Dynavoice, a part of Winn Scandinavia AB
www.facebook.com/dynavoice | www.dynavoice.se